




## PVC TAPE FOR SILO-BAG

The tape for silo-bag repairing is made of PVC with pressure sensitive adhesive, it is flexible, stretchable, resilient, and has an excellent adhesion to the materials which form the bags. The PVC film employed carries agents that absorb UV radiation, granting the tape resistance to severe environmental conditions

### Specifications and presentation

Característica	Unit	Value
Dielectric stiffness	kV/mm	≥ 40
Adhesion to steel	N/cm	≥ 3
Tensile strength	N/cm	≥ 20
Stretching	%	≥ 200
Thickness	mm	0.12 ± 0.02 mm
Dimensions	mm x m	70 x 9
Color		White

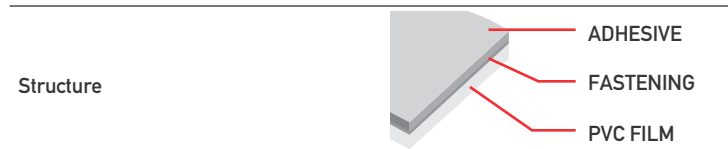

### Applications

- Repairs, patching up, of silo-bags.
- Repairs, patching up of any type of bulk bags in the agriculture, plastic, pigment, construction, manufacturing industry, etc.
- Multipurpose tape for repairs, packaging, fastening, fixing, etc.

### Instructions for use

The surface to be repaired shall be free of dust, liquids and oily substances. Apply the tape by pressing down the adhesive side onto the surface.

### Warranty

TACSA warrants this product for one (1) year of storage in its original package. Do not store at temperatures above 30° C.

*The provided information is based on experimental results under controlled temperature and humidity conditions, and its repetitiveness depends on external conditions, application methods and tools used. TACSA shall not be held liable for any loss, injury, damage or detriment resulting from an incorrect handling or misuse of the product. Its suitability shall be previously determined for the intended purpose.*

[www.tacsa.com.ar](http://www.tacsa.com.ar)