




PTFE TAPE FOR THREAD SEALING

TACSAFLON (PTFE) tape is the perfect material for the installation of water pipes, since it prevents leaks and protects threaded joints. It is easy to install in several surfaces such as threads and copper, steel, plastic or iron piping and, due to its features, it prevents joints from rusting as time goes by. TACSAFLON is suitable for different jobs due to its various presentations as far as width and length of the tape is concerned.

Specifications and presentation

| Feature | Unit | Value |
|---------------------|--------------------|-----------------------------------------------------|
| Tensile strength | MPa | ≥ 8 |
| Pressure resistance | Kg/cm ² | 150-200 |
| Thickness | g/cm ³ | 0,17 |
| Thickness | µm | 75 |
| Stretching | % | ≥ 25 |
| Temperature range | °C | -190/370 |
| Dimensions | pulgadas x m | 1/2 x 10 - x 20 3/4 x 10 - x 20 1 x 10 - x 20 |
| Color | | White |

Structure

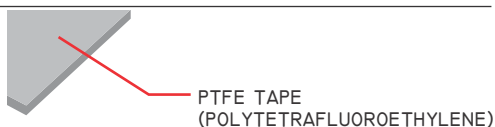

Applications

- Sealing of threaded units, such as piping, shut-off valves, faucets, etc.
- It is used for piping where cold or hot water circulates.

Instructions for use

It has to be firmly applied all over the area from the beginning of the thread. Tape overlapping in layers shall be avoided.

Warranty

TACSA warrants this product for one (1) year of storage in its original package. Do not store at temperatures above 30° C.

The provided information is based on experimental results under controlled temperature and humidity conditions, and its repetitiveness depends on external conditions, application methods and tools used. TACSA shall not be held liable for any loss, injury, damage or detriment resulting from an incorrect handling or misuse of the product. Its suitability shall be previously determined for the intended purpose.

www.tacsa.com.ar