




## SELF-ADHESIVE MASKING TAPE

Self-adhesive crepe paper tape, resistant to UV degradation with pressure sensitive adhesive; it is widely used for protecting and masking surfaces for exterior painting works. Instant adhesion, easy to remove and clean up, easy to tear and you can write on it. It is the perfect partner for painters

### Specifications and presentation

Feature	Unit	Value
Tensile strength	N/cm	≥ 20
Adhesion to steel	N/cm	≥ 2
Tack	cm	< 5
Thickness	mm	0,13 ± 0,01
Dimensions	mm x m	12 x 50
		18 x 50
		24 x 50
		36 x 50
		48 x 50

Color Blue

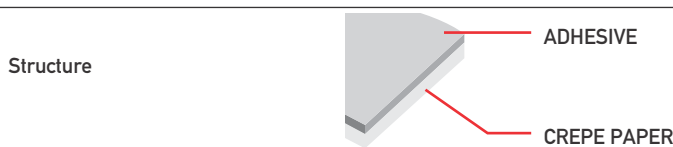

### Applications

- Masking for interior and exterior painting.
- Masking of doors, windows and general protection in decor and painting.
- General purpose: Identification, labeling, fastening and lightweight packing, etc.

### Instructions for use

The surface to be marked out shall be free of dust, liquids, oily substances or other contamination. Apply the tape by pressing down the adhesive side onto the surface. In places where the tape will be removed, it is recommended to test it on a discreet area of the surface where it will be applied, so as to determine its compatibility and removal.

### Warranty

TACSA warrants this product for one (1) year of storage in its original package. Do not store at temperatures above 30° C.

The provided information is based on experimental results under controlled temperature and humidity conditions, and its repetitiveness depends on external conditions, application methods and tools used. TACSA shall not be held liable for any loss, injury, damage or detriment resulting from an incorrect handling or misuse of the product. Its suitability shall be previously determined for the intended purpose.

[www.tacsa.com.ar](http://www.tacsa.com.ar)